



Data Sheet

SNOWDON / SHETLAND


Double Low-Line Tile Ventilator

DESCRIPTION

The Snowdon/Shetland 'Low-Line' ventilators have been designed to be both unobtrusive and practical. The 10k ventilation area is recessed within the profile, and has no sharp edges to trap leaves and any other debris significantly reducing the risk of blocked ventilation and is suitable for pitches of 22.5° and above.

FEATURES:

- Moulded in High Impact Polystyrene.
- UV Acrylic paint to match most tile profiles and finishes.
- Suitable for use with pitches of 22.5° and above.
- Recommended 4mm flyscreen protection.
- Comply fully with the requirements of NHBC, BS 5250 and BR Document C.
- Ventilation area 10,000mm².

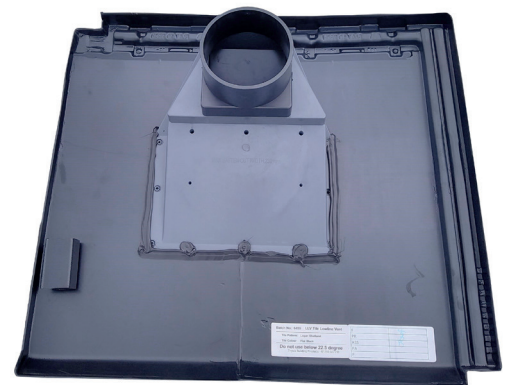

STR110: Square to round pipe adapter to suit 110mm flexi-pipe

Resistance when used as an extract terminal:

10Pa	54m ³ /hr (15 litres/sec)
42Pa	108m ³ /hr (30 Litres/sec)
162Pa	216m ³ /hr (60 Litres/sec)

Spacing centres required to achieve a ventilation area of:

5000mm ² /m	Install at 2.0m centres
10,000mm ² /m	Install at 1.0m centres

LAGAN BUILDING SOLUTIONS LTD

NORTHERN IRELAND

15 Ballyskeagh Road
Lisburn
County Antrim
BT27 5TD

T 028 9264 8691

REPUBLIC OF IRELAND

LBS
The Swan
Athy
County Kildare

T 01 8201551



E info@LBSproducts.com
www.LBSproducts.com